


O-rõngas, NBR70, Ø 22-30 mm




Tootegrupp	849
Materjal	NBR 70
Värv	Must
Maksimaalne temperatuur (°C)	100
Minimaalne temperatuur (°C)	-30

Tootekood	Sisediameeter (mm)	Paksus (mm)
5K00170220020	22	2
5K00170220025	22	2.5
5K00170220030	22	3
5K00170220040	22	4
5K00170220050	22	5
5K00170221016	22.1	1.6
5K00170222026	22.22	2.62
5K00170230020	23	2
5K00170230025	23	2.5
5K00170230030	23	3
5K00170230040	23	4
5K00170231753	23.17	5.33
5K00170234035	23.4	3.53
5K00170234726	23.47	2.62
5K00170240020	24	2
5K00170240025	24	2.5
5K00170240030	24	3
5K00170240040	24	4
5K00170246036	24.6	3.6
5K00170247753	24.77	5.33
5K00170249035	24.99	3.53
5K00170250015	25	1.5
5K00170250020	25	2
5K00170250025	25	2.5
5K00170250030	25	3

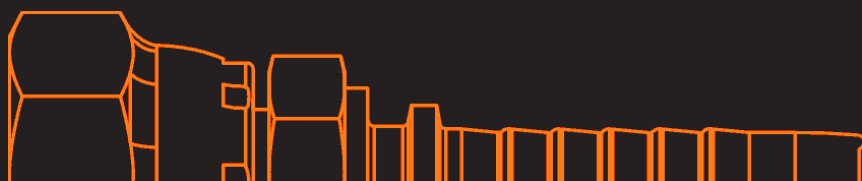

Tootekood	Sisediaameeter (mm)	Paksus (mm)
5K00170250035	25	3.5
5K00170250040	25	4
5K00170250060	25	6
5K00170251016	25.1	1.6
5K00170251018	25.12	1.78
5K00170253024	25.3	2.4
5K00170258035	25.8	3.53
5K00170260015	26	1.5
5K00170260020	26	2
5K00170260025	26	2.5
5K00170260030	26	3
5K00170260040	26	4
5K00170266029	26.59	2.95
5K00170266035	26.58	3.53
5K00170270020	27	2
5K00170270025	27	2.5
5K00170270030	27	3
5K00170270040	27	4
5K00170270045	27	4.5
5K00170270050	27	5
5K00170273024	27.3	2.4
5K00170279035	27.7	3.5
5K00170279053	27.93	5.33
5K00170280020	28	2
5K00170280030	28	3
5K00170280040	28	4
5K00170280045	28	4.5
5K00170280050	28	5
5K00170282035	28.17	3.53
5K00170283018	28.3	1.78
5K00170283026	28.25	2.62
5K00170290020	29	2
5K00170291016	29.1	1.6
5K00170292030	29	3
5K00170295053	29.51	5.34
5K00170297035	29.75	3.53
5K00170298026	29.82	2.62
5K00170299018	29.87	1.78
5K00170300010	30	1
5K00170300020	30	2
5K00170300025	30	2.5
5K00170300040	30	4

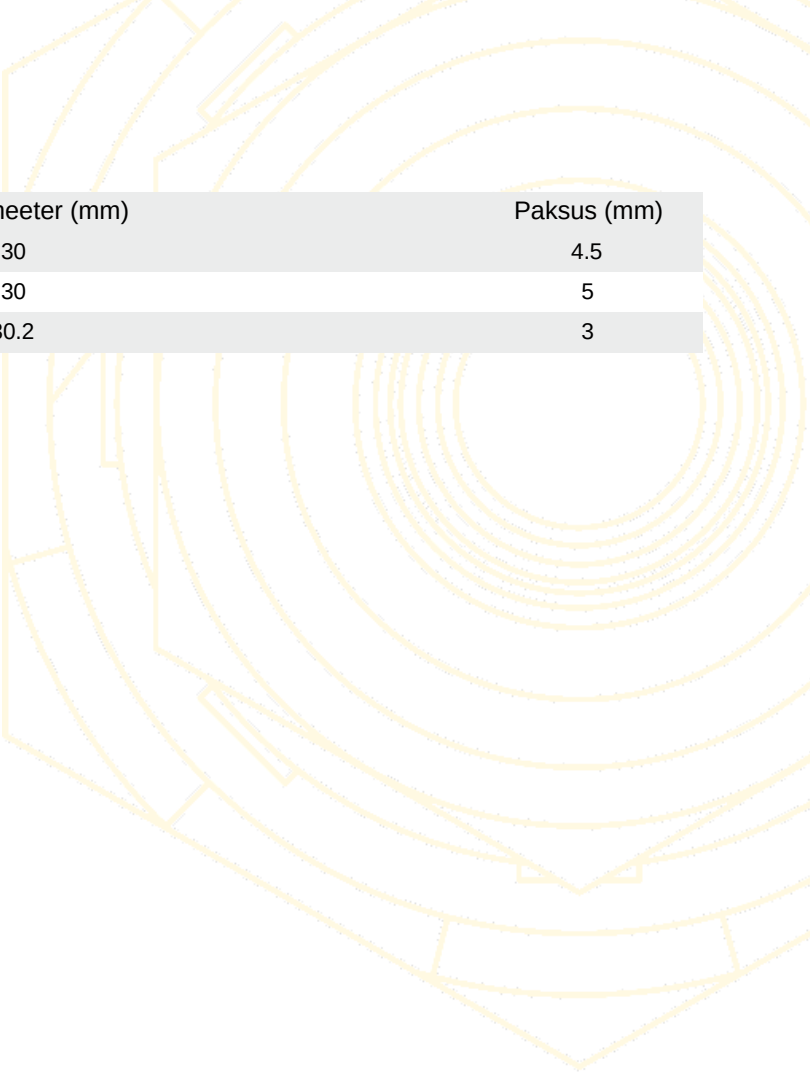

Tootekood	Sisediameeter (mm)	Paksus (mm)
5K00170300045	30	4.5
5K00170300050	30	5
5K00170302030	30.2	3

