


O-rõngas, NBR90, Ø 24-64 mm




Tootegrupp	849
Materjal	NBR 90
Värv	Must
Maksimaalne temperatuur (°C)	100
Minimaalne temperatuur (°C)	-30

Tootekood	Sisediaameeter (mm)	Paksus (mm)
5K00190240030	24	3
5K00190250030	25	3
5K00190250040	25	4
5K00190250726	25.07	2.62
5K00190251218	25.12	1.78
5K00190253024	25.3	2.4
5K00190262030	26.2	3
5K00190265835	26.58	3.53
5K00190266026	26.64	2.62
5K00190267018	26.7	1.78
5K00190270020	27	2
5K00190270030	27	3
5K00190280030	28	3
5K00190281735	28.17	3.53
5K00190282526	28.25	2.62
5K00190283018	28.3	1.78
5K00190292030	29	3
5K00190297435	29.74	3.53
5K00190298226	29.82	2.62
5K00190298718	29.87	1.78
5K00190300020	30	2
5K00190300030	30	3
5K00190300040	30	4
5K00190302024	30.2	2.4
5K00190313435	31.34	3.53

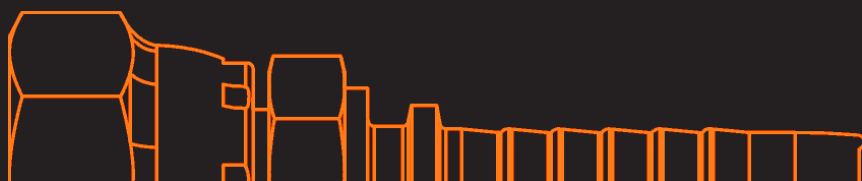

Tootekood	Sisediaameeter (mm)	Paksus (mm)
5K00190314226	31.42	2.62
5K00190314718	31.47	1.78
5K00190320020	32	2
5K00190320040	32	4
5K00190330026	33	2.62
5K00190330030	33	3
5K00190340030	34	3
5K00190345235	34.52	3.53
5K00190346026	34.59	2.62
5K00190346518	34.65	1.78
5K00190350030	35	3
5K00190361035	36.09	3.53
5K00190361726	36.17	2.62
5K00190370020	37	2
5K00190377726	37.77	2.62
5K00190393057	39.3	5.7
5K00190393526	39.35	2.62
5K00190400020	40	2
5K00190400030	40	3
5K00190408735	40.87	3.53
5K00190409526	40.95	2.62
5K00190410018	41	1.78
5K00190412057	41.2	5.7
5K00190425226	42.52	2.62
5K00190440535	44.05	3.53
5K00190441226	44.12	2.62
5K00190442057	44.2	5.7
5K00190450030	45	3
5K00190457026	45.69	2.62
5K00190460020	46	2
5K00190460030	46	3
5K00190472335	47.23	3.53
5K00190473718	47.37	1.78
5K00190480030	48	3
5K00190489026	48.9	2.62
5K00190492057	49.2	5.7
5K00190504035	50.4	3.53
5K00190536035	53.57	3.53
5K00190542057	54.2	5.7
5K00190545030	54.5	3
5K00190560030	56	3
5K00190572057	57.2	5.7



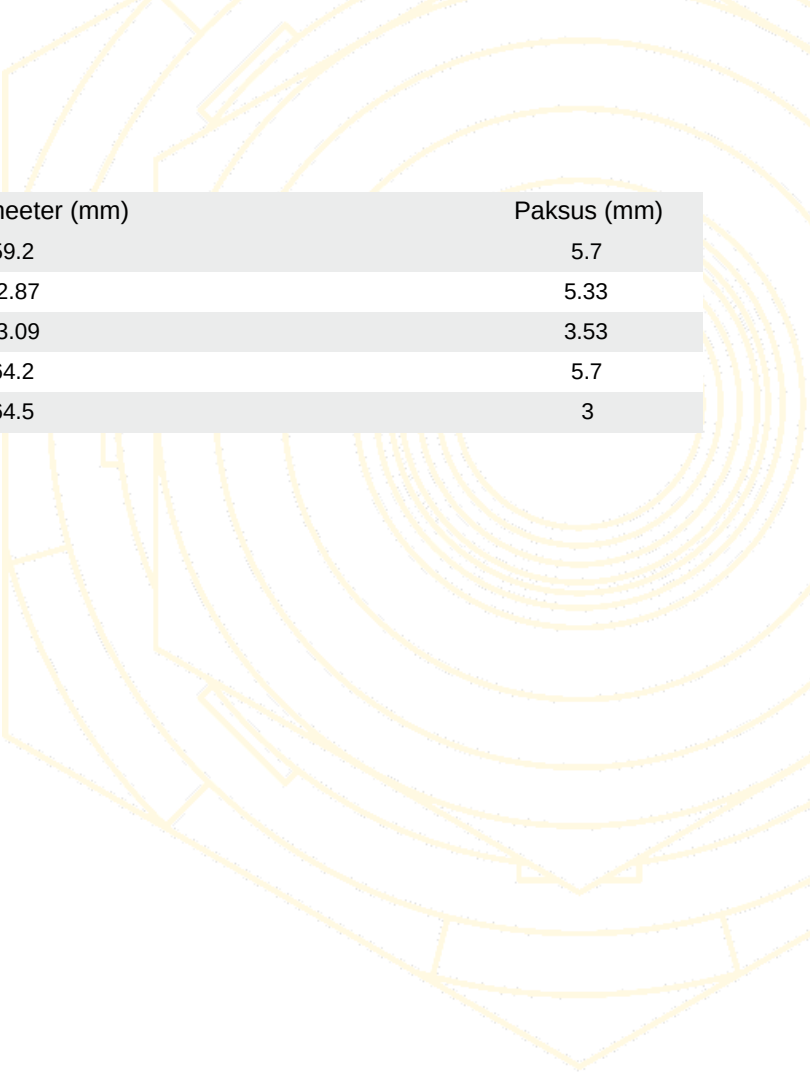

Tootekood	Sisediameeter (mm)	Paksus (mm)
5K00190592057	59.2	5.7
5K00190628753	62.87	5.33
5K00190631035	63.09	3.53
5K00190642057	64.2	5.7
5K00190645030	64.5	3

