


Deltaflex 4 CT



Product group	110
Safety factor	1:4
Bundled pipes/hoses	1
Cover tube resistance	, , ,
Hose label	yellow
Certificate	, ,
Max temperature (°C)	121
Reinforcement layers	4
Min temperature (°C)	-40

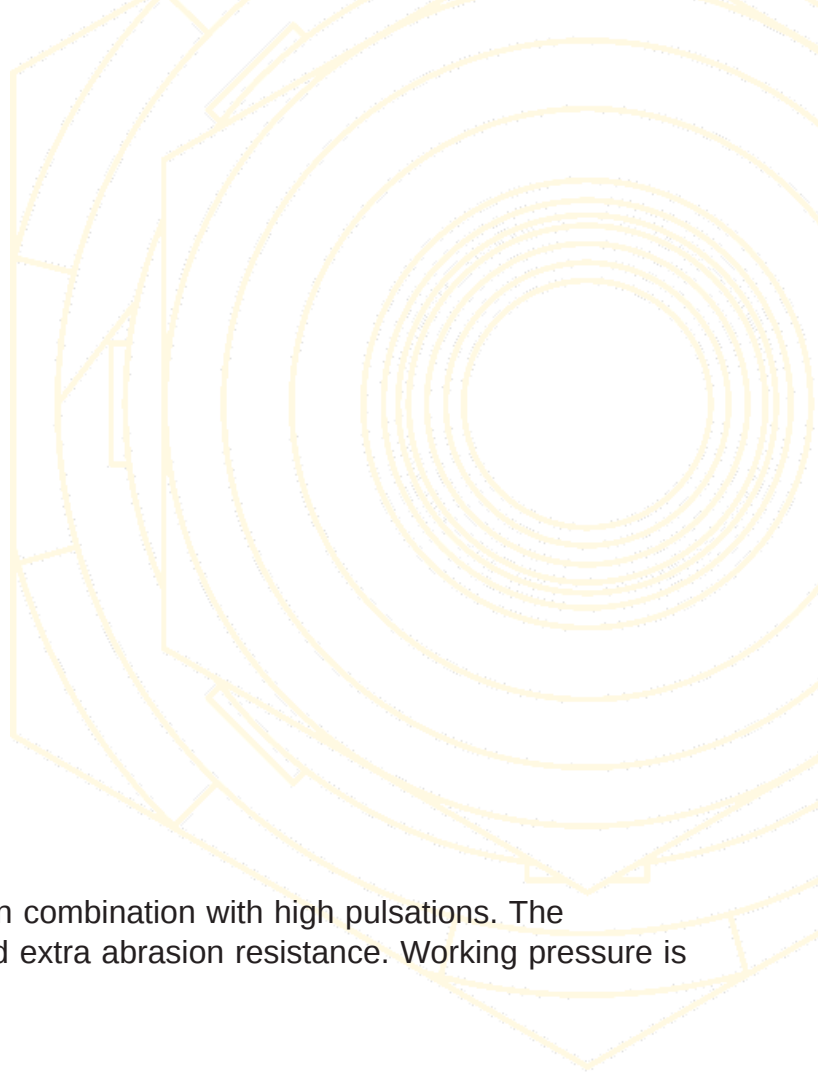

Flexible hydraulic hose for high pressures in combination with high pulsations. The external polymer rubber has low friction and extra abrasion resistance. Working pressure is equivalent to, or exceeds, EN 856 4SP

	ID (inch)	ID (mm)	OD (mm)	Working pressure (MPa)	Bend radius (mm)	Weight (kg)
11151006	3/8"	10	21.4	44.5	130	0.7
11151008	1/2"	13	24.6	42.5	180	0.85
11151010	5/8"	16	28.2	39	225	1.11
11151012	3/4"	19	32.2	35	280	1.41
11151016	1"	25	39.7	32	340	1.86
11151020	1 1/4"	32	45.5	34.5	460	2.57
11151024	1 1/2"	38	53.5	29	560	3.32
11151032	2"	51	68.1	25	700	4.7

