


WELDARC, WELDING HOSE EN 559 ISO 3821 20 BAR

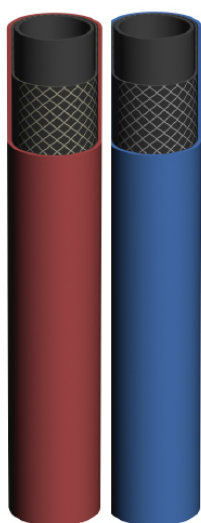

Product group	140
Safety factor	1:3
Bundled pipes/hoses	1
Antistatic wire	
Flat coil	
Max temperature (°C)	60
Reinforcement layers	1
Min temperature (°C)	-20

This welding hose is suitable for all types of aggregates, high ignition temperature and low diffusion. It is very good air pressure hose and flexible even in low temperatures. According to the latest European Norm ISO 3821.

	ID (mm)	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Weight (kg)
14400103	5	50	12	50	2	0.13
14400104	6.3	50	13.3	60	2	0.15
14400105	8	50	15	80	2	0.18
14400106	10	50	17	100	2	0.2
14400203	5	50	12	50	2	0.13
14400204	6.3	50	13.3	60	2	0.15
14400205	8	50	15	80	2	0.18
14400206	10	50	17	100	2	0.2

