

Gas exhaust hose, stainless steel




Product group 140
Antistatic wire
Flat coil
Max temperature (°C) 700

Spiral wired gas exhaust hose with round cross section and labyrinth profile for e.g. exhaust gases, pellets and granulates. Can also be used as mechanical cable protection.

	OD (mm)	Bend radius (mm)	ID (mm)	Weight (kg)
14800012	24	70	20	0.5
14800014	26	77	22	0.55
14800016	29	86	25	0.62
14800019	34	101	30	0.73
14800020	37	160	32	0.77
14800022	40	170	35	0.97
14800024	43	190	38	1.05
14800025	45	200	40	1.1
14800026	47	210	42	1.15
14800030	50	225	45	1.23
14800032	55	250	50	1.23
14800038	60	265	55	1.35
14800039	65	275	60	1.46
14800040	70	285	65	1.58
14800044	75	300	70	1.7
14800048	80	310	75	1.81
14800051	85	320	80	1.93
14800056	95	345	90	2.17
14800062	105	375	100	2.4
14800064	107	380	102	2.45



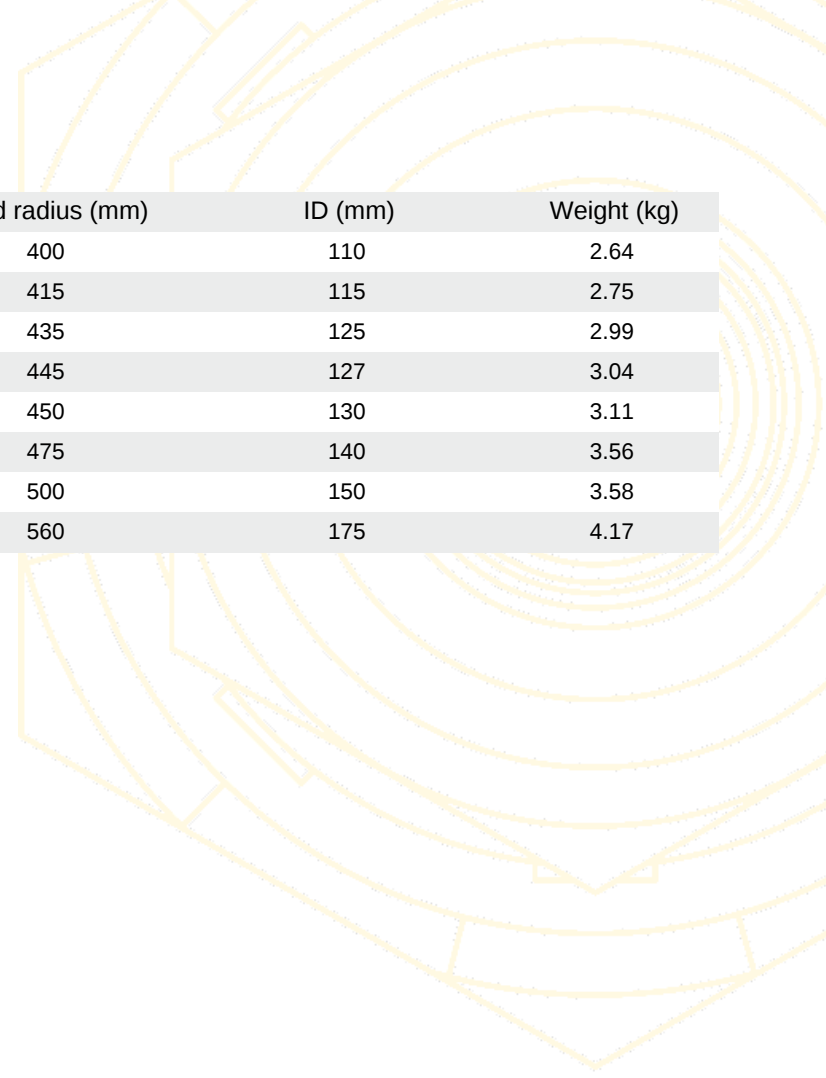

	OD (mm)	Bend radius (mm)	ID (mm)	Weight (kg)
14800070	115	400	110	2.64
14800074	120	415	115	2.75
14800079	130	435	125	2.99
14800080	132	445	127	3.04
14800082	135	450	130	3.11
14800085	145	475	140	3.56
14800096	155	500	150	3.58
14800175	175	560	175	4.17

