


GAMMAFLEX 4



Product group	120
Cover tube resistance	, ,
Safety factor	1:4
Bundled pipes/hoses	1
Max temperature (°C)	100
Reinforcement layers	4
Min temperature (°C)	-40

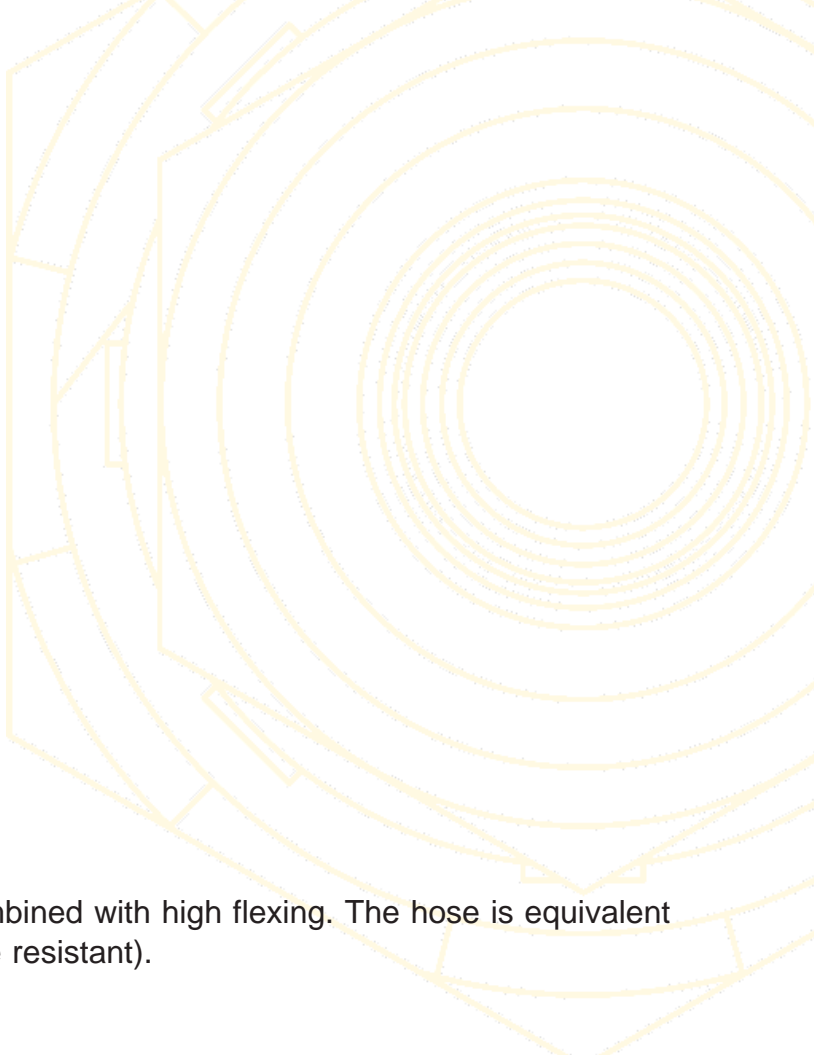

The hose is suitable for high pressures combined with high flexing. The hose is equivalent to EN856 4SP and MSHA-approved (Flame resistant).

	ID (inch)	ID (mm)	OD (mm)	Working pressure (MPa)	Bend radius (mm)	Weight (kg)
11150204	1/4"	6.5	17.4	45	150	0.57

