




Media description	, ,
Safety factor	1:3
Bundled pipes/hoses	1
Cover tube resistance	,
Flat coil	
Antistatic wire	
Max temperature (°C)	100
Reinforcement layers	2
Min temperature (°C)	-40



	ID (mm)	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Weight (kg)
14561004	6	40	14	40	3	0.18
14561005	8	40	17	50	3	0.26
14561006	10	40	20	60	3	0.34
14561008	13	40	23	80	3	0.41
14561010	16	40	27	100	3	0.55
14561012	19	40	30	115	3	0.63
14561016	25	40	37	150	2.5	0.87
14561020	32	40	44	200	2.5	1.14
14561024	38	40	51	250	2.5	1.4
14561026	42	40	56	340	2.5	1.56
14561032	50	40	66	400	2.5	2.03

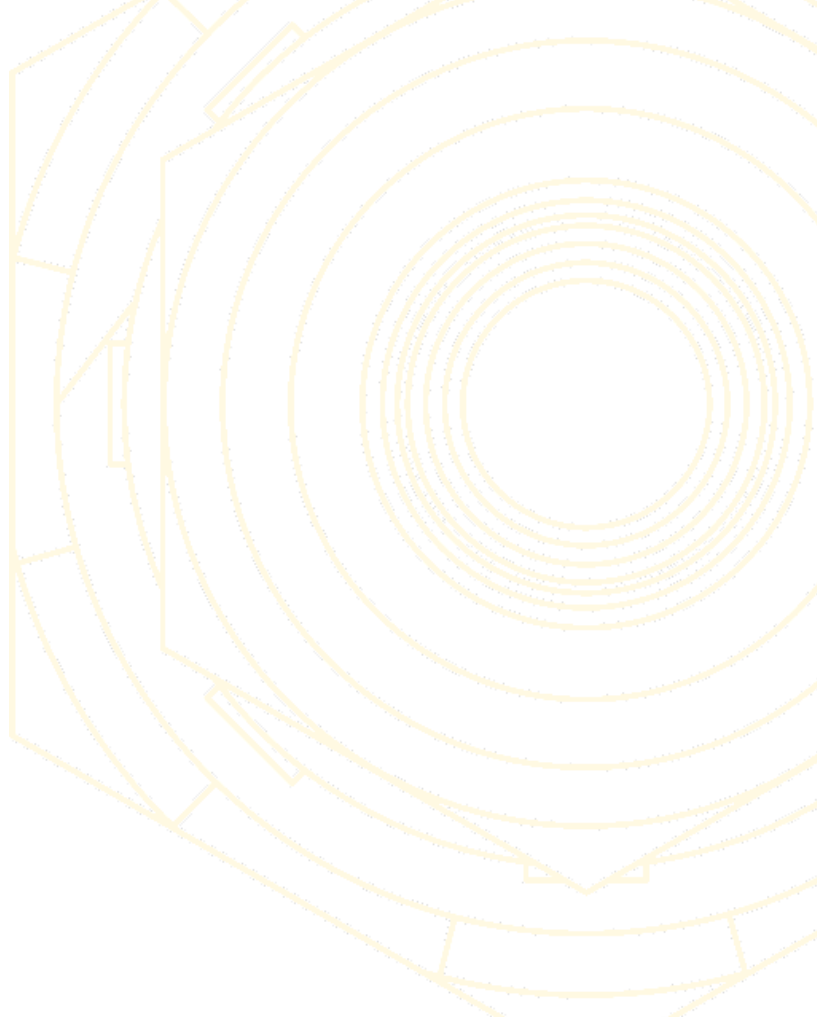